


### READ THIS FIRST!

These supplemental instructions supersede all references to the armature in the 3101B and 2101 Series installation manuals. Armatures now utilize a plastic housing which may contain magnets for use with the Door Status Monitor option, and all washers have been eliminated from the hardware pack.

### ARMATURE INSTALLATION

Following the template for door preparation, attach the armature mounting plate assembly to the door using four (4) #10x1" sheet metal screws. Attach armature housing to the plate using four (4) 8-32x3/8" machine screws. Attach the armature to the plate as shown. Firmly tighten the armature mounting screw using a 3/16" hex wrench.

**Failure to properly secure the armature to the bracket could result in serious injury or possible security breach.**

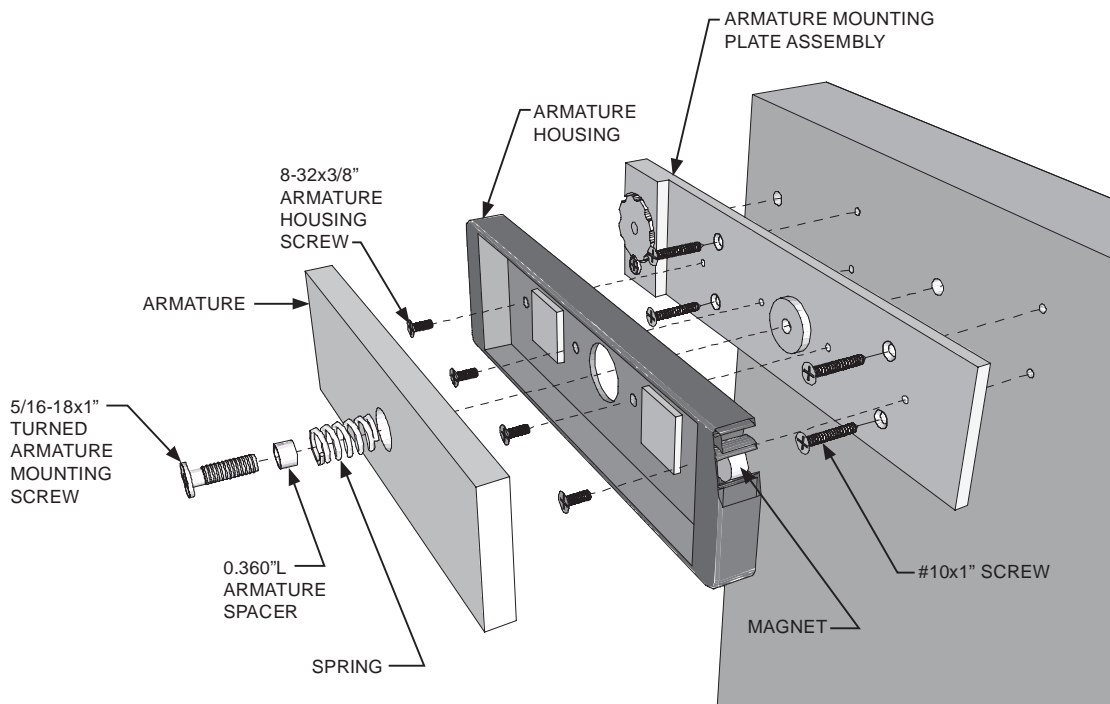

**NOTE:** For locks ordered with the DSM or HSM option, please verify that two magnets are installed inside the armature housing.