


SPECIFICATIONS

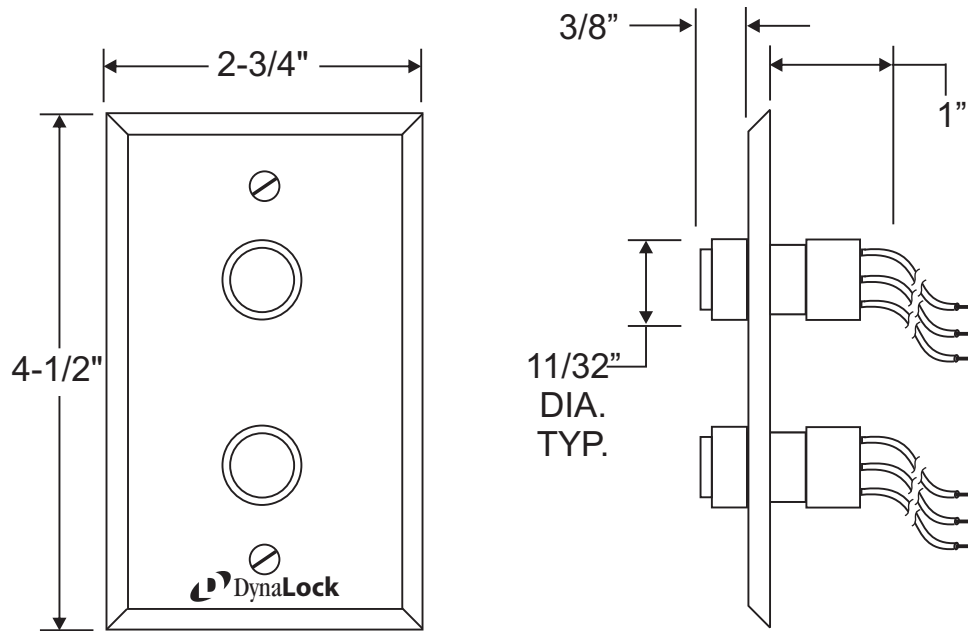

DYNALOCK #6125 PUSH BUTTON FEATURES:



TWO 5/8" DIA. GREEN PLASTIC BUTTONS ON SINGLE-GANG BRUSHED STAINLESS STEEL FACEPLATE.

7" COLOR-CODED #18AWG WIRE LEAD TERMINATIONS.

MOMENTARY (#6125M) OR ALTERNATE -ACTION (#6125A) CONTACTS, RATED 5 AMPS @ 125VAC.

OPTIONAL ILLUMINATED BUTTON ('ILM' OPTION, AS ORDERED). SEE WIRING INFORMATION FOR DETAILS.

WIRING INFORMATION

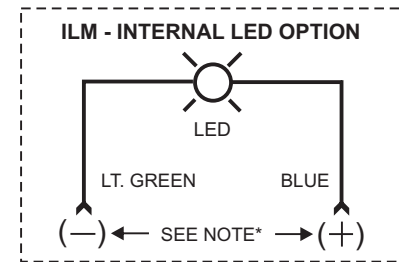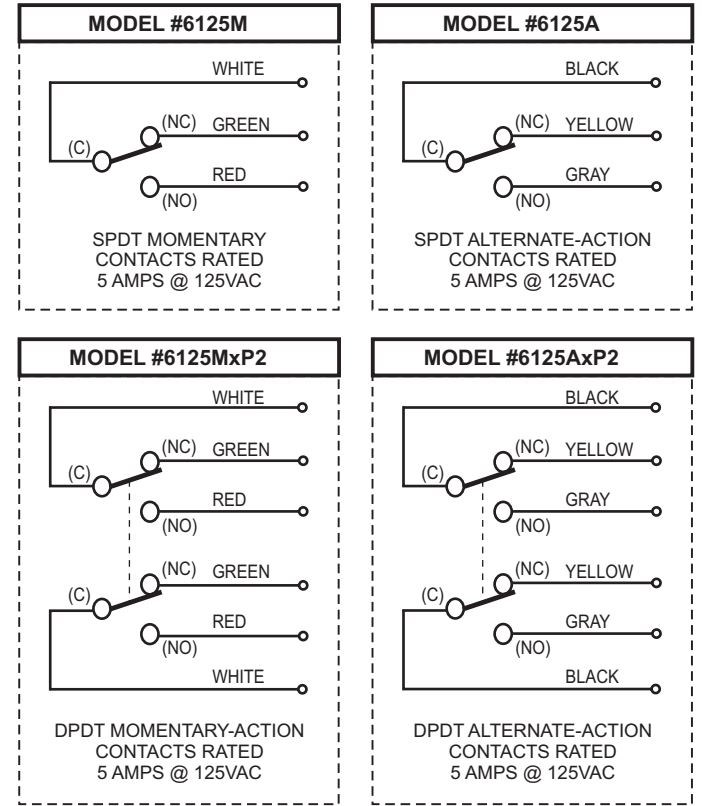

***NOTE:**
ILM OPTION VOLTAGE ____ 12VDC ____ 24VDC

DynaLock
705 Emmett Street
Bristol, CT 06010

TITLE
SERIES #6125 DUAL PUSH BUTTON STATION

DRN. BY JAS
DATE 01/09/04
SCALE ____

DWG. NO.
600246